




- Best CFL option for applications requiring directional light
- Powered by a compact T3 spiral tube
- Not waterproof
- Clear and frosted covers both available
- 8000 hours lifetime standard
- Suitable for recessed lighting in hallways and kitchens
- Complies with MEPS and SAA for Australian market, CE and RoHS for Europe, UL for North America



Part No	CR2011AU0A-01	CR3015AU0A-01	CRT023AU0A-01
Wattage (W)	11	15	23
Voltage Range (V)	220-240	220-240	220-240
Rated Current (mA)	200	273	418
Rated Frequency (Hz)	50/60	50/60	50/60
Power Factor	≥0.5	≥0.5	≥0.5
Lumens (lm)	350	700	1100
Luminous Efficiency (lm/W)	32	47	48
Color (K)	WW/NW/CW	WW/NW/CW	WW/NW/CW
Base Type	E27	E27	E27
Life Time (Hrs)	8000	8000	8000
Dimensions HxDxAxB (mm)	36.7x36.2x30.5	51.9x31.2x32.9	52.3x39.0x37.9
Certificates	C-Tick/SAA	C-Tick/SAA	C-Tick/SAA

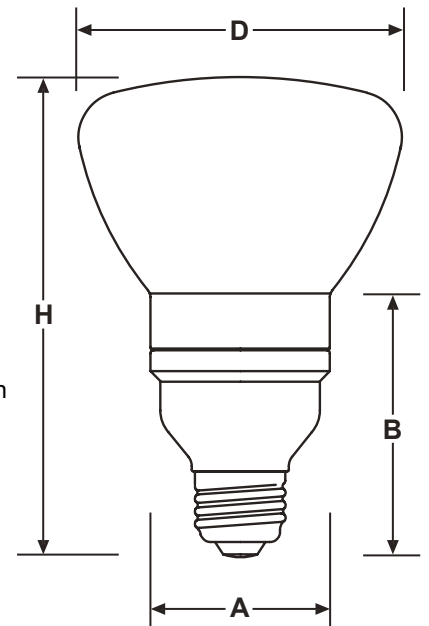