




- Impressive 15,000 hour lifetime
- High Power Factor (HPF) bulb rated at 0.95 across all wattages
- Meets stringent IEC 60969 requirements
- Uses 75% less electricity than equivalent incandescent bulb
- Less than 2.5mg of mercury
- Not for use with dimmers
- Suitable for government backed projects in Australia
- Carries C-Tick, MEPS and SAA certification

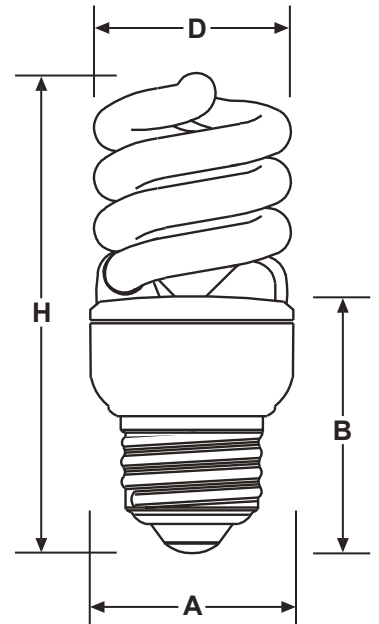

Part No	CH2011AU4A-01	CH2015AU4A-01
	CH2011AU4C-01	CH2015AU4C-01
Wattage (W)	11	15
Voltage Range (V)	220-240	220-240
Rated Current (mA)	100	120
Rated Frequency (Hz)	50/60	50/60
Power Factor	≥0.95	≥0.95
Lumens (lm)	700	900
Luminous Efficiency (lm/W)	64	60
Color (K)	WW/NW/CW	WW/NW/CW
Base Type	B22/E27	B22/E27
Life Time (Hrs)	10000 15000	10000 15000
Dimensions HxDxAxB (mm)	103x42x38x55.5	115x36x41.4x57.5
Certificates	C-Tick/MEPS/SAA	C-Tick/MEPS/SAA