




- ≡ The original CFL bulb
- ≡ Uses 70% less electricity than equivalent incandescent light bulbs
- ≡ Available in Cool White, Natural White and Warm White colours
- ≡ Non-dimmable
- ≡ Contains only 2.5mg of mercury
- ≡ Up to 8,000 hour lifetime
- ≡ Suitable for commercial building lighting (hallways, lobbies) and cost-focused retail/restaurant chains
- ≡ Available in a range of voltages and with certification for most markets



Part No	C24009AU0A-01	C24011AU0A-01	C24015AU0A-01
Wattage (W)	9	11	15
Voltage Range (V)	220-240	220-240	220-240
Rated Current (mA)	80	100	135
Rated Frequency (Hz)	50/60	50/60	50/60
Power Factor	≥0.5	≥0.5	≥0.5
Lumens (lm)	450	600	800
Luminous Efficiency (lm/W)	50	55	53
Color (K)	WW/NW/CW	WW/NW/CW	WW/NW/CW
Base Type	B22/E27	B22/E27	B22/E27
Life Time (Hrs)	8000	8000	8000
Dimensions HxDxAxB (mm)	132x27x41x65	142x27x41x65	152x27x41x65
Certificates	C-Tick/SAA	C-Tick/SAA	C-Tick/SAA

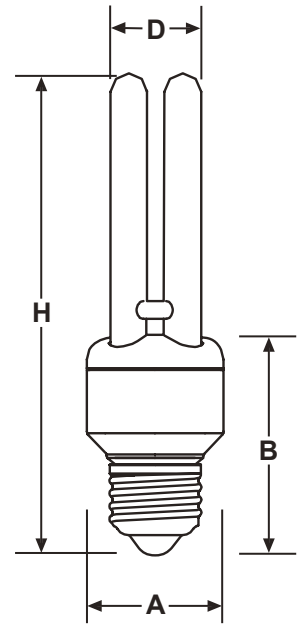