




- ☰ Designed as a decorative luminaire for mood lighting environments
- ☰ Direct replacement
- ☰ T2 Spiral Tube inside the cover
- ☰ General E14/E27 base
- ☰ Only uses 5-11 Watts of energy
- ☰ Replaces traditional 30W Candle bulb
- ☰ Not to be used with dimmers
- ☰ 8000 hours of light capability
- ☰ Ideal for hotel and home applications
- ☰ Suitable for chandeliers

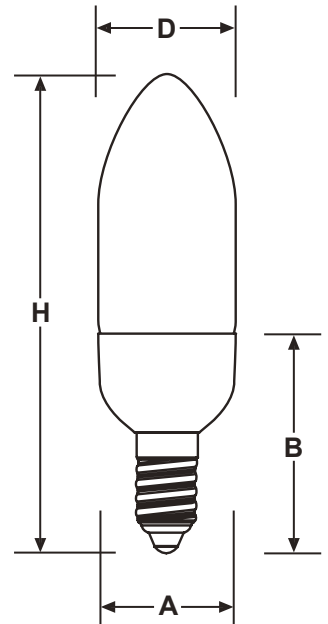

Part No	CCA005200A-01	CCA007200A-01	CCA009200A-01	CCA011200A-01
Wattage (W)	5	7	9	11
Voltage Range (V)	220-240	220-240	220-240	220-240
Rated Current (mA)	45	65	81	100
Rated Frequency (Hz)	50/60	50/60	50/60	50/60
Power Factor	≥0.5	≥0.5	≥0.5	≥0.5
Lumens (lm)	250	350	450	600
Luminous Efficiency (lm/W)	50	50	50	55
Color (K)	WW/NW/CW	WW/NW/CW	WW/NW/CW	WW/NW/CW
Base Type	E14/E27	E14/E27	E14/E27	E14/E27
Life Time (Hrs)	8000	8000	8000	8000
Dimensions HxDxAxB (mm)	101x37x37x41	106x37x37x41	109x37x37x41	113x37x37x41
Certificates	CE/RoHS	CE/RoHS	CE/RoHS	CE/RoHS